

DS9 Quick Start Guide



READ THIS


Read this guide before using your system. Failure to follow these directions voids all warranties.

View the quick start video:
www.abcWindowSupply.com/ds9quickstart

Secure System

It is important to secure your WaterFed® system to your vehicle.

Note: failure to securely attach system may result in property damage or injury. User accepts all liability.

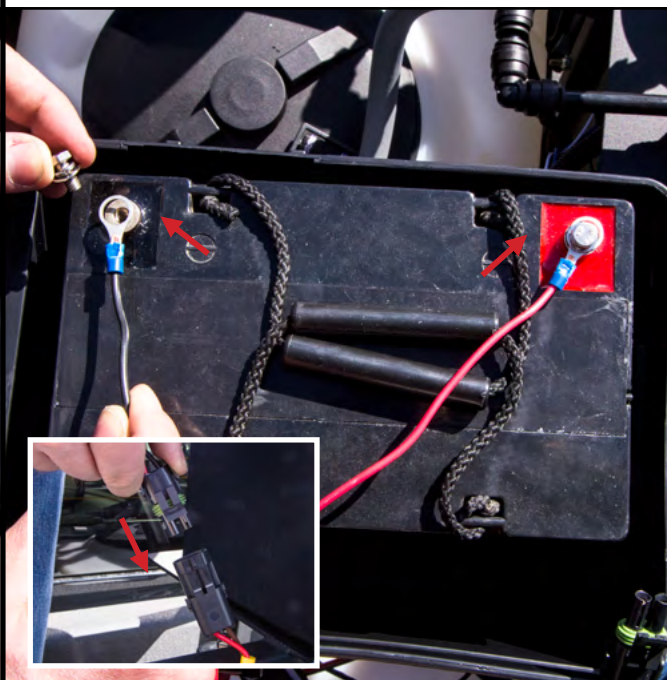

Power Option: Battery



Wire battery using battery's instructions. Attach plug from battery to system.

Refer to manual for recommended battery specifications.

Power Option: AC Power

Wire AC converter using converter's instructions. Attach plug from converter to system.

Refer to manual for recommended converter specifications.

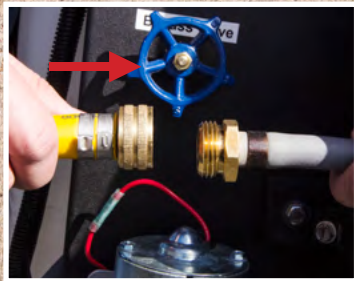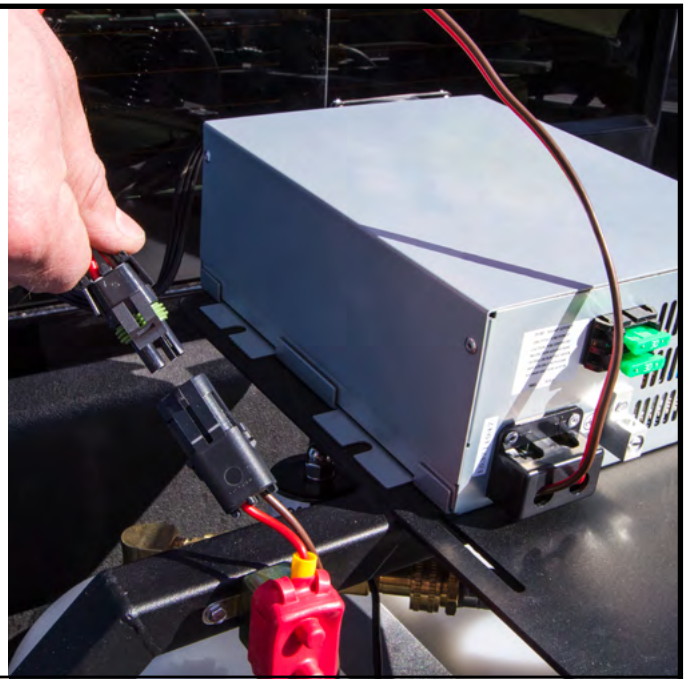

1

Part One: Filling The Tank

Direct bypass hose so that bypass water flows to a desirable location.

Optional: attach additional hose for further reach.

Source Hose


Connect your water source to the garden hose fitting on your Carbon/Sediment filter.



Turn On Water

Fully open bypass valve.

Note: at least some water must be coming out of the bypass hose at all times while in use.

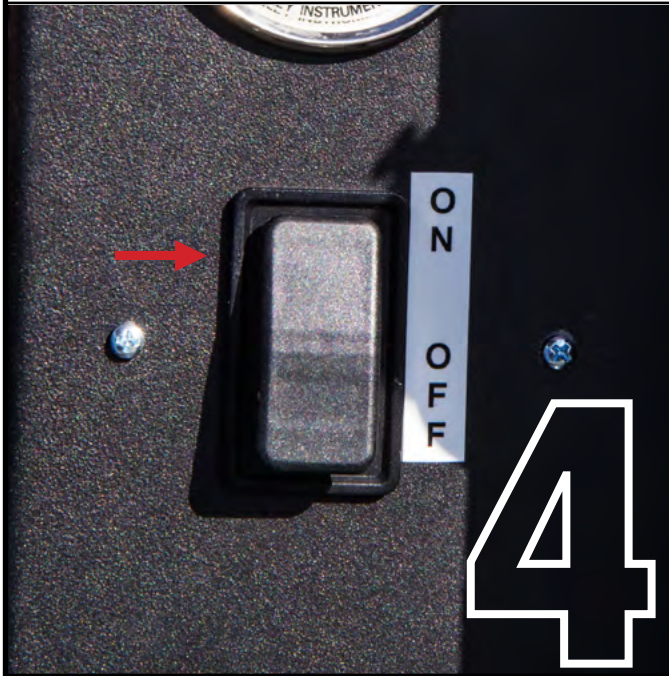


Turn On Pump

Turn on the pump by pushing the on switch.

Pump

Restrict bypass until operating pressure is between 80-120 psi.

Note: running your system in excess of 120 psi will result in damage to your filters.

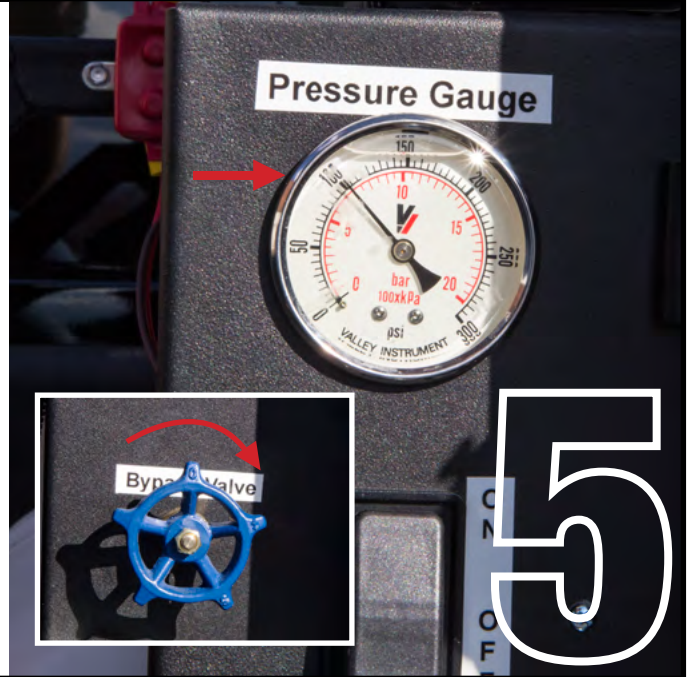

Fill Tank

At least 10-15 gallons must be in tank before starting Part Two.

Tank can be prefilled or filled while cleaning windows.

Refer to manual for more information.



Flush Filters

When you are done filling your tank, fully open the *bypass valve*. This will flush your RO membranes prolonging their life.

Do This for 1-2 minutes.
Turn off pump (if used).

Turn off Water.

Note: If filling tank while cleaning windows, do this after Part Two.



Part Two: Water Output

Connect pole to quick connect on hose reel.






Open Valve

Make sure quick connect is in the open position.

Open Tank Valve

Move the valve to the open position.

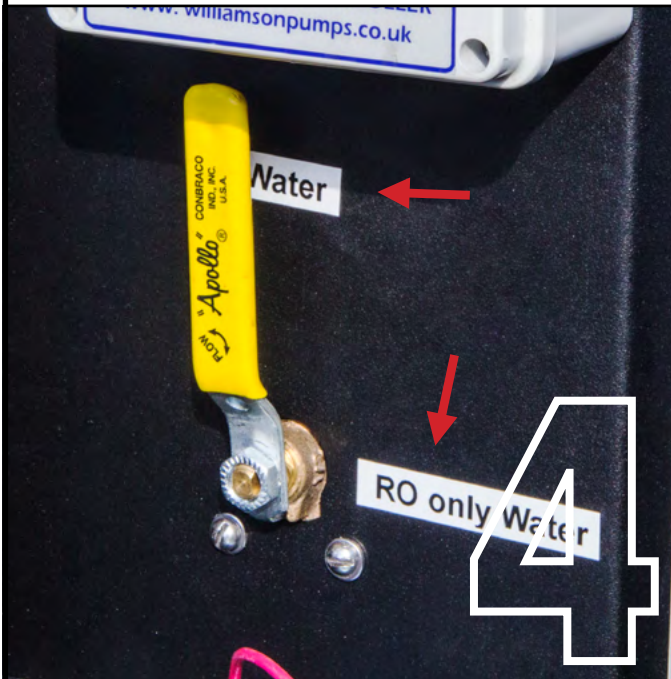

Select Water Purity

Select RO only or RO / DI.

Refer to manual for more information.

Pump Controller

Turn on pump controller and adjust to desired level.

Refer to manual for more information.



Clean Windows

Enjoy your DS9 system!