

SG2 (2018 & After) Quick Start Guide



READ THIS

Read this guide before using your system. Failure to follow these directions voids all warranties.


View the quick start video:
www.abcwindowssupply.com/SG2QS

Starting Out

When you first get started, this is how your cart will look. The rest of this guide will explain getting from here to cleaning windows.



1

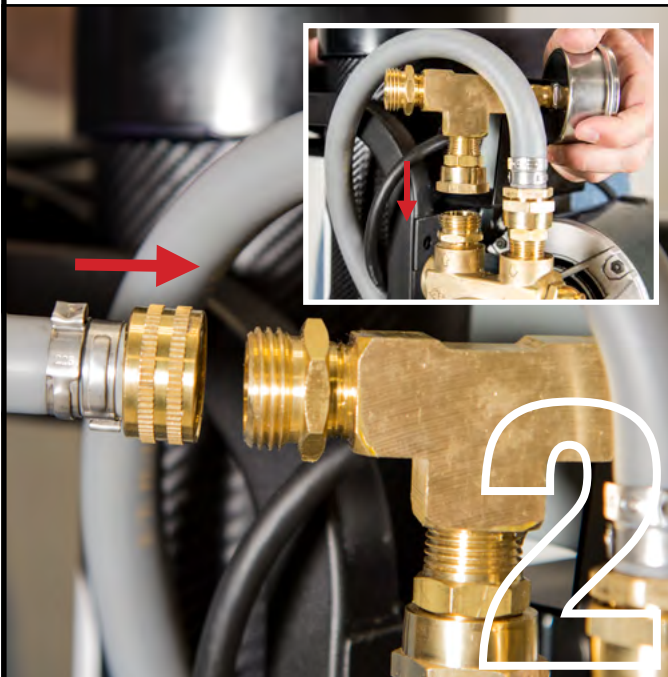

Pressure Gauge

Connect the pressure gauge to the outlet side of the pump. Connect the 16" hose to the pressure gauge.

RO Filter

Connect other end of 16" hose to the top of the RO filter.



Source Hose

Disconnect black bypass hose from bottom of Carbon/Sediment filter.

Connect your water source to the garden hose fitting on your Carbon/Sediment filter.

Bypass Hose

Fully open bypass hose. (Note: the valve should be positioned as pictured).



Wye Valve

Check the brass wye valve located on the bottom of the RO filter. The valves should be positioned as pictured.




Pressure Gauge

Attach the pressure gauge and quick connect valve to top of DI filter.

Pole


Connect your pole using the quick connect/shut off valve provided with your system. Make sure the shut off valve is in the open position.

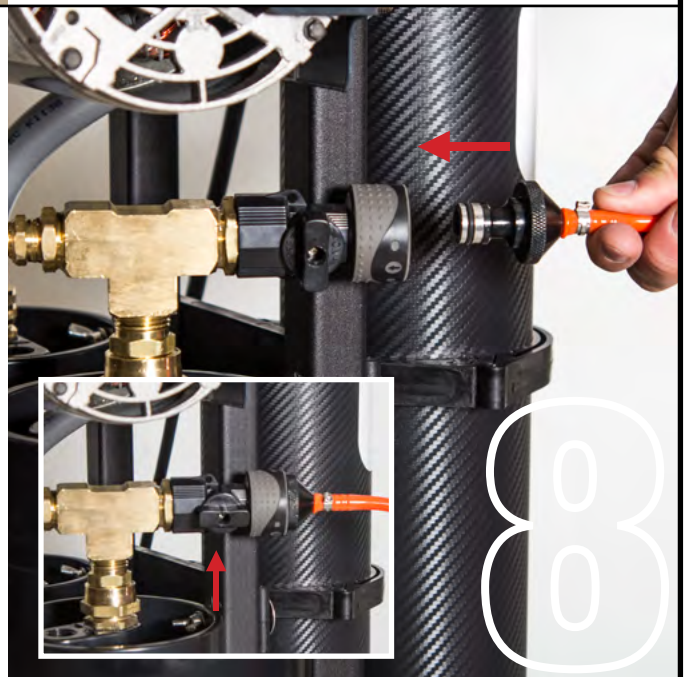

Turn On Water

Reduce bypass water using valve to desired discharge. 1:1 ratio of discharge to output is optimal.

At least some water must be coming out at all times while in use.

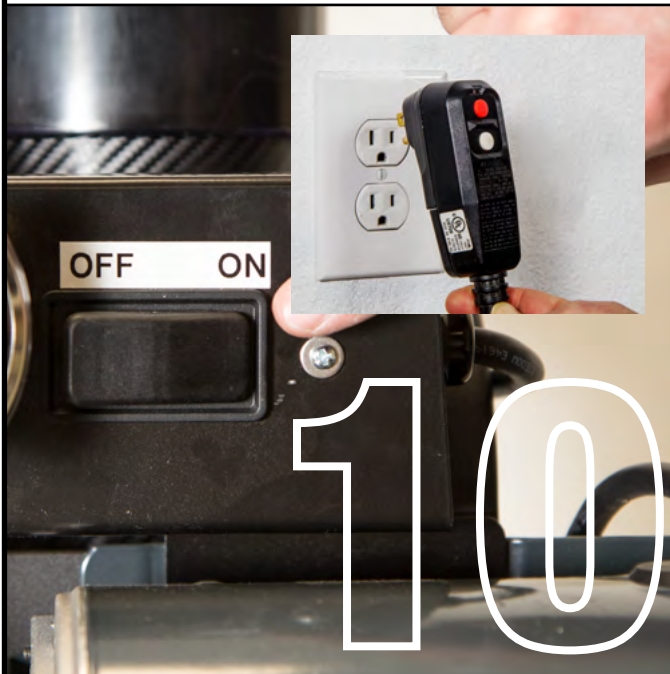

Turn On Pump

Plug in your cart. Turn on the pump by pushing the ON switch.

Note: ensure water is flowing through the system and shut off is open with water flowing out before turning on the pump to avoid damaging your pump.

Refer to manual for more information on pump operation.

Clean Windows

Enjoy your SG2 system!

