

SG2 Quick Start Guide



READ THIS

Read this guide before using your system. Failure to follow these directions voids all warranties.

View the quick start video:
www.abcwindowssupply.com/sg2quickstart

Starting Out

When you first get started, this is how your cart will look. The rest of this guide will explain getting from here to cleaning windows.



Carbon Filter

Using tools (not included) connect the Carbon filter to the inlet side of pump with the included hose.

RO Filter

Connect the RO filter to the outlet side of pump with the included hose.



Source Hose

Connect your water source to the garden hose fitting on your Carbon/Sediment filter.





Bypass Hose

Optionally, add hose to RO bypass to redirect bypass water.



Pressure Gauge

Attach the pressure gauge and quick connect valve to DI outlet.

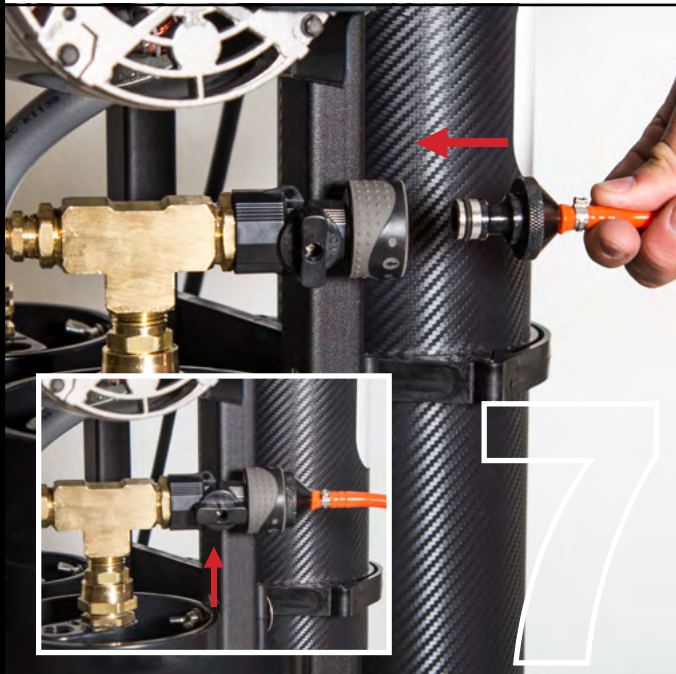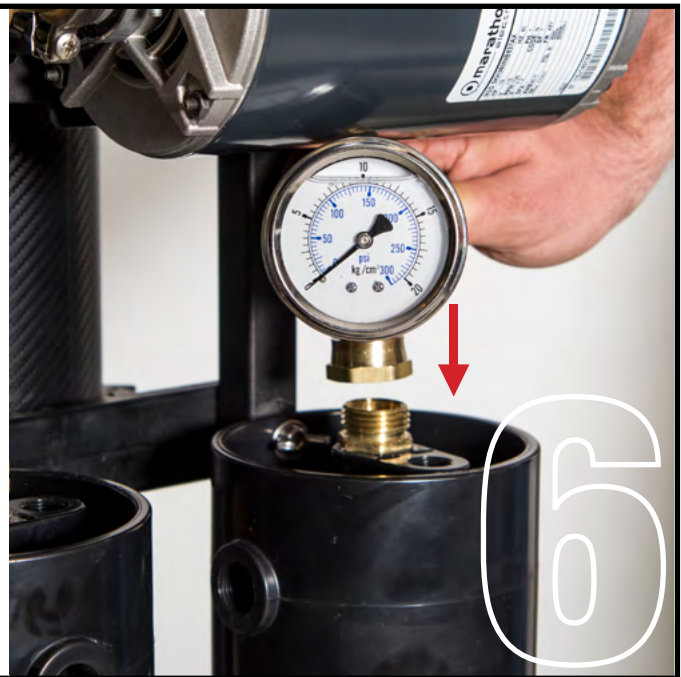

Pole

Connect your pole using the quick connect/shut off valve provided with your system. Make sure the shut off valve is in the open position.

Turn On Water

Reduce bypass water using valve to desired discharge. 1:1 ratio of discharge to clean water output is optimal.


At least some water must be coming out at all times while in use.



Turn On Pump

Plug in your cart. Turn on the pump by pushing the ON switch.

Note: ensure water is flowing through the system and shut off is open with water flowing out before turning on the pump to avoid damaging your pump.

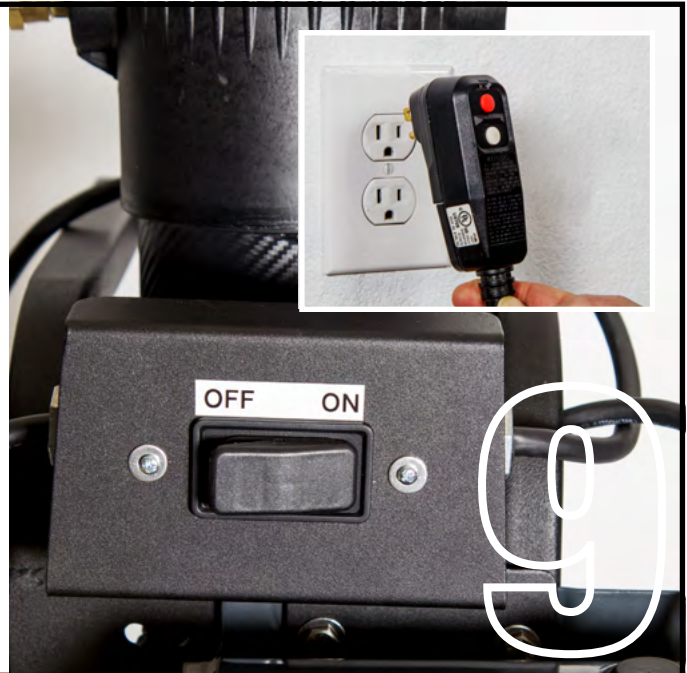

Pump

Check that operating pressure is less than 110 psi.

Note: running your system in excess of 120 psi will result in damage to your filters.

Clean Windows

Enjoy your SG2 system!

