

READ THIS

Read this guide before using your system. Failure to follow these directions voids all warranties.

View the quick start video: www.abcwindowsupply.com/nxt4quickstart

Starting Out

When you first get started, this is how your cart will look. The rest of this guide will explain getting from here to cleaning windows.





Attach Handle

Using tools (not included) tighten nut on to handle bolt.

RO Bypass

Insert the tubing into the 1/4" fitting on the cartridges marked RO. The output end of the Bypass Hose can be run wherever you find best.






Source Hose

Connect your water source to the garden hose fitting on your Carbon/Sediment filter.

Hose


Attach hose treel to pump.

Optional: you can run the system without the pump by attaching the hose reel directly to the bottom of the DI Filter.



Pole

Connect your pole using the quick connect/shut off valve provided with your system. Make sure the shut off valve is in the on position.

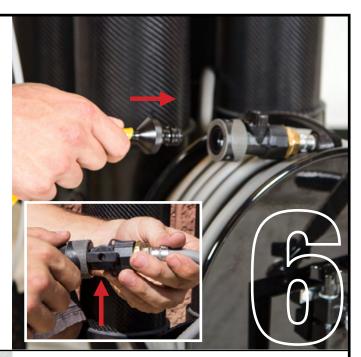



Plug In


Plug in your cart.

Note: only follow this step if you are planning on using the pump.

Turn On Water

Close your bypass valve until only a trickle is coming out.

At least some water must be coming out at all times while in use.

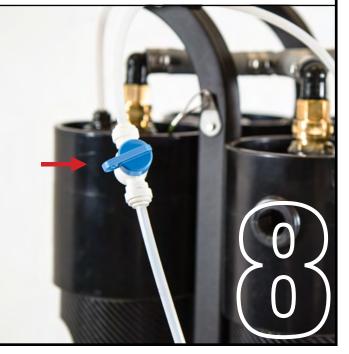

Turn On Pump

Turn on the pump by pushing the on switch.

Note: ensure water is flowing through the system before turning on the pump to avoid damaging your pump.



Window




Clean Windows

Enjoy your NXT system!

Shut Down Procedure

When you are done using your system, fully open the *bypass valve* and close the *shut off valve*. This will flush your RO membranes prolonging their life.

Do This for 1-2 minutes. Turn off pump (if used).

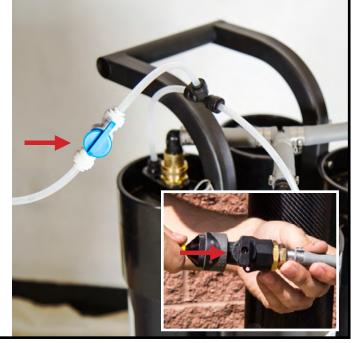

Turn off Water.